

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/EP05/051405

International filing date: 28 March 2005 (28.03.2005)

Document type: Certified copy of priority document


Document details: Country/Office: FR  
Number: 0403904  
Filing date: 13 April 2004 (13.04.2004)

Date of receipt at the International Bureau: 11 October 2005 (11.10.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

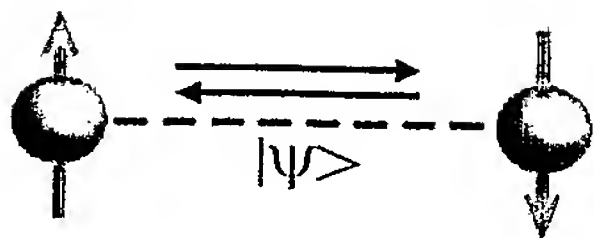

PCT/EP200 5/ 0 5 1 4 0 5  
E-Quantic Communications SARL à capital variable  
Allée des Chériniers - 03190 GIVARLAIS - France  
Phone : +33 (0)4 70 06 00 37 - email : rdesbrandes@e-quantic.com  
RCS : MONTLUÇON 478 026 461 (2004 B 101) - TVA intra-communautaire : FR64478026461

Professeur Robert Desbrandes  
Conseiller Scientifique Principal  
Allée des Chériniers  
03190 GIVARLAIS  
rdesbrandes@e-quantic.com  
+33 (0)4 70 06 00 37

Le 26 septembre 2005

à Receiving Office  
Office Européen des Brevets  
P.B. 5818 Patentlaan 2  
NL-2280 HV RIJSWIJK  
Hollande.

EPO - DG 1

OBJET : Soumission du 28 mars 2005  
N° de demande PCT : PCT/EP2005/051405  
Notre référence : E-QUANTIC/02

30. 09. 2005

(61)

Monsieur,

Veuillez trouver ci-joint la copie officielle de la demande de brevet INPI N° 0403904 du 13 avril 2004 ayant pour titre :

**Procédé et Appareillage pour communiquer à distance en utilisant des nucléides isomères.**

Veuillez agréer, Monsieur, l'assurance de mes sentiments distingués.

R. Desbrandes



EPO - DG 1

30. 09. 2005

(61)

# BREVET D'INVENTION

**CERTIFICAT D'UTILITÉ - CERTIFICAT D'ADDITION**

## COPIE OFFICIELLE

Le Directeur général de l'Institut national de la propriété industrielle certifie que le document ci-annexé est la copie certifiée conforme d'une demande de titre de propriété industrielle déposée à l'Institut.

Fait à Paris, le 12 SEP. 2005

Pour le Directeur général de l'Institut  
national de la propriété industrielle  
Le Chef du Département des brevets

Martine PLANCHE

INSTITUT  
NATIONAL DE  
LA PROPRIÉTÉ  
INDUSTRIELLE

SIEGE  
26 bis, rue de Saint-Petersbourg  
75800 PARIS cedex 08  
Téléphone : 33 (0)1 53 04 53 04  
Télécopie : 33 (0)1 53 04 45 23  
www.inpi.fr

Institut National de la Propriété Industrielle  
INPI

**UTILITY PATENT –UTILITY CERTIFICATE**

**OFFICIAL COPY**

The Director of the Institut National de la Propriété Industrielle certifies that the appended document is the certified copy of a patent submitted to the intitute.

Paris, [date as stated on original French copy]

For the Director of the Institut  
National de la Propriété  
Industrielle,  
The Head of the Patent  
Department

[signed]

Martine Planche



26 bis, rue de Saint Pétersbourg - 75800 Paris Cedex 08

Pour vous informer : INPI DIRECT

**0 825 83 85 87**

0,15 € TTC/mn

Télécopie : 33 (0)1 53 04 52 65

Réservé à l'INPI

1er dépôt

**BREVET D'INVENTION**  
**CERTIFICAT D'UTILITÉ**

Code de la propriété intellectuelle - Livre VI

PCT/EP200 5/ 05 1 4 05

N° 11354\*04

**REQUÊTE EN DÉLIVRANCE**

page 1/2

**BR1**

Cet imprimé est à remplir lisiblement à l'encre noire

DB 540 @ W / 030103

REMISE DES PIÈCES

DATE

LIEU

13 AVR. 2004

N° D'ENREGISTREMENT

NATIONAL ATTRIBUÉ PAR L'INPI

0403904

DATE DE DÉPÔT ATTRIBUÉE

PAR L'INPI

13 AVR. 2004

**Vos références pour ce dossier**

(facultatif) DVG\_RD\_#2

**NOM ET ADRESSE DU DEMANDEUR OU DU MANDATAIRE**  
**À QUI LA CORRESPONDANCE DOIT ÊTRE ADRESSÉE**

DESBRANDES Robert  
Allée des Chériniers  
03190 GIVARLAIS

**Confirmation d'un dépôt par télécopie**

☐ N° attribué par l'INPI à la télécopie

**2 NATURE DE LA DEMANDE**

**Cochez l'une des 4 cases suivantes**

Demande de brevet

☒

Demande de certificat d'utilité

☐

Demande divisionnaire

☐

*Demande de brevet initiale*

N°

Date

*ou demande de certificat d'utilité initiale*

N°

Date

Transformation d'une demande de

brevet européen *Demande de brevet initiale*

☐

N°

Date

**3 TITRE DE L'INVENTION** (200 caractères ou espaces maximum)

Procédé et Appareillage pour communiquer à distance en utilisant des nucléides isomères.

**4 DÉCLARATION DE PRIORITÉ**

**OU REQUÊTE DU BÉNÉFICE DE**

**LA DATE DE DÉPÔT D'UNE**

**DEMANDE ANTÉRIEURE FRANÇAISE**

Pays ou organisation

Date

N°

Pays ou organisation

Date

N°

Pays ou organisation

Date

N°

☐ **S'il y a d'autres priorités, cochez la case et utilisez l'imprimé «Suite»**

**5 DEMANDEUR** (Cochez l'une des 2 cases)

☐ **Personne morale**

☒ **Personne physique**

Nom

ou dénomination sociale

DESBRANDES

Prénoms

Robert

Forme juridique

N° SIREN

Code APE-NAF

Domicile

ou  
siège

Rue

Code postal et ville

Pays

Allée des Chériniers

03190 GIVARLAIS

FRANCE

FRANCE

04 70 06 00 37

N° de télécopie (facultatif)

rdesbrandes@wanadoo.fr

☒ **S'il y a plus d'un demandeur, cochez la case et utilisez l'imprimé «Suite»**

Remplir impérativement la 2<sup>ème</sup> page


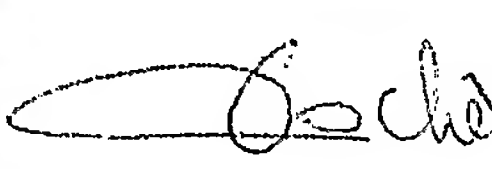
**BREVET D'INVENTION**  
**CERTIFICAT D'UTILITÉ****REQUÊTE EN DÉLIVRANCE**  
page 2/2**BR2**

REMISE DES PIÈCES DATE LIEU 30		Réservé à l'INPI 13 AVR. 2004	
N° D'ENREGISTREMENT NATIONAL ATTRIBUÉ PAR L'INPI		0403904	
6 MANDATAIRE (s'il y a lieu)			
Nom			
Prénom			
Cabinet ou Société			
Nationalité			
N° de pouvoir permanent et/ou de lien contractuel			
Adresse	Rue		
	Code postal et ville		
	Pays		
N° de téléphone (facultatif)			
N° de télécopie (facultatif)			
Adresse électronique (facultatif)			
7 INVENTEUR (S)		Les inventeurs sont nécessairement des personnes physiques	
Les demandeurs et les inventeurs sont les mêmes personnes		<input checked="" type="checkbox"/> Oui <input type="checkbox"/> Non : Dans ce cas remplir le formulaire de Désignation d'inventeur(s)	
8 RAPPORT DE RECHERCHE		Uniquement pour une demande de brevet (y compris division et transformation)	
Établissement immédiat ou établissement différé		<input checked="" type="checkbox"/> <input type="checkbox"/> Choix à faire obligatoirement au dépôt (cf. Notice explicative Rubrique 8)	
9 RÉDUCTION DU TAUX DES REDEVANCES		Uniquement pour les personnes physiques <input type="checkbox"/> Requête pour la première fois pour cette invention (joindre un avis de non-imposition) <input type="checkbox"/> Obtenue antérieurement à ce dépôt pour cette invention (joindre une copie de la décision d'admission à l'assistance gratuite ou indiquer sa référence) : AG	
10 SÉQUENCES DE NUCLEOTIDES ET/OU D'ACIDES AMINÉS		<input type="checkbox"/> Cochez la case si la description contient une liste de séquences	
Le support électronique de données est joint		<input type="checkbox"/>	
La déclaration de conformité de la liste de séquences sur support papier avec le support électronique de données est jointe		<input type="checkbox"/>	
Si vous avez utilisé l'imprimé «Suite», indiquez le nombre de pages jointes		1	
11 SIGNATURE DU DEMANDEUR OU DU MANDATAIRE (Nom et qualité du signataire)		VISA DE LA PRÉFECTURE OU DE L'INPI	
DESBRANDES ROBERT			

La loi n°78-17 du 6 janvier 1978 relative à l'informatique, aux fichiers et aux libertés s'applique aux réponses faites à ce formulaire.  
Elle garantit un droit d'accès et de rectification pour les données vous concernant auprès de l'INPI.



**BREVET D'INVENTION**  
**CERTIFICAT D'UTILITÉ****REQUÊTE EN DÉLIVRANCE**  
page 2/2**BR2**

REMISE DES PIÈCES DATE LIEU 		Réservé à l'INPI 13 AVR. 2004	
N° D'ENREGISTREMENT NATIONAL ATTRIBUÉ PAR L'INPI		0403904	
<b>6 MANDATAIRE</b> (s'il y a lieu)			
Nom		DESBRANDES	
Prénom		Robert	
Cabinet ou Société			
Nationalité		Française	
N° de pouvoir permanent et/ou de lien contractuel			
Adresse	Rue	Allée des Chéniers	
	Code postal et ville	103190 GIVARLAIN	
	Pays	FRANCE	
N° de téléphone (facultatif)			
N° de télécopie (facultatif)			
Adresse électronique (facultatif)		rdesbrandes@wanadoo.fr	
<b>7 INVENTEUR (S)</b>			
Les demandeurs et les inventeurs sont les mêmes personnes		<input checked="" type="checkbox"/> Oui <input type="checkbox"/> Non : Dans ce cas remplir le formulaire de Désignation d'inventeur(s)	
<b>8 RAPPORT DE RECHERCHE</b>			
Établissement immédiat ou établissement différé		<input checked="" type="checkbox"/> Uniquement pour une demande de brevet (y compris division et transformation) <input type="checkbox"/> Choix à faire obligatoirement au dépôt (cf. Notice explicative Rubrique 8)	
<b>9 RÉDUCTION DU TAUX DES REDEVANCES</b>			
		Uniquement pour les personnes physiques <input type="checkbox"/> Requise pour la première fois pour cette invention (joindre un avis de non-imposition) <input type="checkbox"/> Obtenue antérieurement à ce dépôt pour cette invention (joindre une copie de la décision d'admission à l'assistance gratuite ou indiquer sa référence) : AG <input type="checkbox"/>	
<b>10 SÉQUENCES DE NUCLEOTIDES ET/OU D'ACIDES AMINÉS</b>			
Le support électronique de données est joint		<input type="checkbox"/>	
La déclaration de conformité de la liste de séquences sur support papier avec le support électronique de données est jointe		<input type="checkbox"/>	
Si vous avez utilisé l'imprimé «Suite», indiquez le nombre de pages jointes		1	
<b>11 SIGNATURE DU DEMANDEUR OU DU MANDATAIRE</b> (Nom et qualité du signataire)		<b>VISA DE LA PRÉFECTURE OU DE L'INPI</b>	
DESBRANDES ROBERT			




BREVET D'INVENTION  
CERTIFICAT D'UTILITÉ  
Ces deux brevets sont soumis à la Loi n° 1110 du 4 juillet 1958



REQUÊTE EN DELIVRANCE

0403904

Page suite N° ... / ...



INPI  
13 AVR. 2004  
39

Cet imprimé est à remplir soigneusement à l'encre noire

1. DÉCLARATION DE PROTECTOR OU REQUÊTEUR DU BREVET DE LA DATE DE DÉPÔT DU BREVET ANTÉRIEUR FRANÇAIS		DVS RD 112	
Pays ou organisation		N°	
Date		N°	
Pays ou organisation		N°	
Date		N°	
2. DÉCLARATION DE PROTECTOR OU REQUÊTEUR DU BREVET DE LA DATE DE DÉPÔT DU BREVET ANTÉRIEUR FRANÇAIS		3. DÉCLARATION DE PROTECTOR OU REQUÊTEUR DU BREVET DE LA DATE DE DÉPÔT DU BREVET ANTÉRIEUR FRANÇAIS	
Nom ou dénomination sociale		Nom ou dénomination sociale	
Prénoms		Prénoms	
Forme juridique		Forme juridique	
N° SIREN		N° SIREN	
Code APE-NAF		Code APE-NAF	
Domicile ou siège	Rue	10227 Del Cano Avenue	
	Code postal et ville	70181-191 Baton Rouge, Louisiana	
	Pays	USA	
Nationalité		USA	
N° de téléphone (France)			
N° de télécopie (France)			
Adresse électronique (France)			
4. DÉCLARATION DE PROTECTOR OU REQUÊTEUR DU BREVET DE LA DATE DE DÉPÔT DU BREVET ANTÉRIEUR FRANÇAIS		5. DÉCLARATION DE PROTECTOR OU REQUÊTEUR DU BREVET DE LA DATE DE DÉPÔT DU BREVET ANTÉRIEUR FRANÇAIS	
Nom ou dénomination sociale		Nom ou dénomination sociale	
Prénoms		Prénoms	
Forme juridique		Forme juridique	
N° SIREN		N° SIREN	
Code APE-NAF		Code APE-NAF	
Domicile ou siège	Rue		
	Code postal et ville		
	Pays		
Nationalité			
N° de téléphone (France)			
N° de télécopie (France)			
Adresse électronique (France)			
6. SIGNATURE DU BREVETÉ OU DU PROPRIÉTAIRE (Nom et qualité du déposant)		7. SIGNATURE DU BREVETÉ OU DU PROPRIÉTAIRE (Nom et qualité du déposant)	
Daniel Lee VAN GENT, Daniel Lee		Daniel Lee VAN GENT, Daniel Lee	

La loi n° 78-17 du 6 janvier 1978 relative à l'informatique, aux fichiers et aux libertés s'applique aux réponses faites à ce formulaire.  
Elle garantit un droit d'accès et de rectification pour les données vous concernant auprès de l'INPI.





Pour vous informer : INPI DIRECT  
0 825 83 85 87  
0,15 € TTC/min

Faxe : 33 (0)1 53 04 52 65

# PATENT CERTIFICATE OF UTILITY

Intellectual property code - Book VI 26 (a),  
26, bis rue de Pétersbourg Saint - 75800 Paris Cedex 08



## REQUEST IN DELIVERY page 1/2

BR1

This form shall be filled with black ink

DB 540 @W/010905

Reserved with the INPI	
HANDING-OVER OF THE DOCUMENTS DATE  PLACE  NATIONAL RECORDING N° ALLOTTED BY THE INPI  DATE OF DEPOSIT ALLOTTED BY THE INPI	<b>1 NAME AND ADDRESSES OF THE APPLICANT OR THE AGENT TO WHICH IT CORRESPONDENCE MUST BE ADDRESSED</b>  .  .
<b>Your references for this file</b> <i>(optional)</i>	
<b>Confirmation of a deposit by fax</b>	<input type="checkbox"/> Nbr. allotted by the INPI to the fax
<b>NATURE OF THE REQUEST</b>	<b>Tick one of the 4 following boxes</b>
Patent application	<input type="checkbox"/>
Application for certificate of utility	<input type="checkbox"/>
Divisional request	<input type="checkbox"/>
<i>Initial patent application</i>	Nbr. Date
<i>or initial certificate of utility application</i>	Nbr. Date
Transformation of a request for European patent <i>initial patent application</i>	Nbr. Date
<b>3 TITLE OF THE INVENTION (200 characters or spaces maximum)</b>	
<b>4 DECLARATION OF PRIORITY OR REQUEST OF THE BENEFIT OF THE DATE OF FILING OF ONE FRENCH PREVIOUS REQUEST</b>	Country or organization Date Nbr.
	Country or organization Date Nbr.
	Country or organization Date Nbr.
	<input type="checkbox"/> If there are other priorities, tick the box and uses the "continuation" form
<b>5 APPLICANT (Tick one of the 2 boxes)</b>	<input type="checkbox"/> Legal entity <input type="checkbox"/> Individual
Name or company name	
First names	
Legal form	
SIREN Nbr.	
APE-NAF Code	
Residence or headquarter	Street
	Postal code and city
	Country
Nationality	
Telephone Nbr. <i>(optional)</i>	fax Nbr. <i>(optional)</i>
Electronic Address - email <i>(optional)</i>	
<input type="checkbox"/> If there is more than one applicant, ticks the box and uses the "continuation" form	

Fill the 2<sup>nd</sup> page



PATENT  
CERTIFICATE OF UTILITY


REQUEST IN DELIVERY  
page 2/2

BR2

Received with the INPI	
HANDING-OVER OF THE DOCUMENTS	
DATE	
PLACE	
NATIONAL RECORDING Nbr.	
ALLOTTED BY THE INPI	
DB 540 @W/010905	
6 AGENT (if it is necessary)	
Name	
First name	
Cabinet or Company	
Nationality	
Permanent capacity Nbr. and/or of contractual bond	
Address	Street
	Postal code and city
	Country
Telephone Nbr. (optional)	
Fax Nbr. (optional)	
Electronic address -- email (optional)	
7 INVENTOR (S)	
The inventors are necessarily physical people	
Applicants and inventors are the same people	<input type="checkbox"/> Yes <input type="checkbox"/> No: In this case to fill the form "Designation of inventor(s)"
8 RESEARCH REPORT	
Only for a patent application (including division and transformation)	
Immediate establishment or deferred establishment	<input type="checkbox"/> Choice to be made obligatorily with at filing time (refer to Explanatory leaflet Heading 8) <input type="checkbox"/>
9 REDUCTION OF THE FEES	
(refer to Explanatory leaflet Heading 9)	
10 SEQUENCES OF NUCLEOTIDES AND/OR OF AMINO ACIDS	
The electronic medium of data is joined	<input type="checkbox"/>
The declaration of conformity of the list of sequences on paper medium with electronic medium of data is joined	<input type="checkbox"/>
If you used the printed form "Continuation", indicate the number of joined pages	
11 SIGNATURE OF THE APPLICANT OR OF THE AGENT (Name and quality of the signatory)	
PREFECTURE OR INPI VISA	



PATENT  
CERTIFICATE OF UTILITY  
Code de la propriété intellectuelle - Livre VI  
REQUEST IN DELIVERY



Additional page N° . . . / . . .

HANDING-OVER OF THE DOCUMENTS DATE  PLACE  NATIONAL RECORDING NBR ALLOTTED BY THE INPI		This printed paper form is to be filled lisiblement with black ink as	
Your references for this file <i>(optional)</i>			
4 DECLARATION OF PRIORITY OR REQUEST OF THE BENEFIT OF THE DATE OF FILING OF ONE FRENCH PREVIOUS REQUEST	Country or organization		
	Date	Nbr.	
	Country or organization		
	Date	Nbr.	
	Country or organization		
	Date	Nbr.	
§ APPLICANT (Tick one of the 2 boxes)		<input type="checkbox"/> Legal entity	<input type="checkbox"/> Individual
Name or company name			
First names			
Legal form			
SIREN Nbr.			
APE-NAF Code			
Residence or headquarter	Street		
	Postal code and city		
	Country		
Nationality			
Telephone Nbr <i>(optional)</i>			
Fax Nbr. <i>(optional)</i>			
Electronic Address - email <i>(optional)</i>			
§ APPLICANT (Tick one of the 2 boxes)		<input type="checkbox"/> Legal entity	<input type="checkbox"/> Individual
Name or company name			
First names			
Legal form			
SIREN Nbr.			
APE-NAF Code			
Residence or headquarter	Street		
	Postal code and city		
	Country		
Nationality			
Telephone Nbr <i>(optional)</i>			
Fax Nbr. <i>(optional)</i>			
Electronic Address - email <i>(optional)</i>			
11 SIGNATURE OF THE APPLICANT OR OF THE AGENT (Name and quality of the signatory)		PREFECTURE OR INPI VISA	

The present invention relates to a method and an equipment to remotely communicate by using isomer nuclides.

Some nuclides have a metastable state. These states are isomers, i.e. excited states of the nucleus of the atom. The isomers return in their ground state by isomeric transition while emitting a gamma radiation. The isomeric transition, like internal conversion, does not give place to a change of atomic number. In its normal state, an isomer returns in its ground state with an exponential law like the other radioactive elements. This exponential law is generally characterized by the half-life of the radioactive element. The half-life is related to the probability of deexcitation by the formula:

$$P = \text{LN} (2) / \lambda$$

P, probability of disintegration per minutes;  
LN, natural logarithm;  
 $\lambda$ , half-life in minutes.

For example, the half-life of normal indium  $115^m$  is 268 minutes. The probability of deexcitation of a nucleus per minutes is 0.00258 which represents one chance on 387 per minute. By normal indium  $115^m$ , one indicates a classically excited isomer.

There are indeed several ways of exciting nuclides likely to have a metastable state. It can be excited by neutron irradiation or simply come from the disintegration of a heavier nucleus. It was announced in another invention that the excitation can also take place by reverse isomeric transition with gamma irradiation. When this excitation is caused by gamma emitted by the same nucleus in a cascade, the half-life varies with time instead of being constant. A similar phenomenon but even more important is obtained with gamma obtained by Bremsstrahlung with the particle accelerators.

This invention rests on experiments made with a



source of Cobalt 60 of which each nucleus has the characteristic to emit in a cascade two gamma with sufficient energy to excite Indium 115. Other measurements were made by exciting Indium 115 with gamma coming from a compact linear accelerator. The gamma spectrum extends from 0 to 6 MeV, but is maximum at about 1.5 MeV, i.e. that, in majority, three or four gamma are emitted in a cascade by the same electron, when the accelerator uses electrons.

It is known to the experts that the deexcitation of an isomer can be accelerated by X-ray or gamma irradiation. In this invention this property will be used.

The invention consists in irradiating by the method described previously, and simultaneously, two or several samples of the same element that are likely to have a metastable state. One will consider initially two samples. The two samples are then separated in space by a large distance from at least 10 meters. One of the samples which we will call "master" is excited using x-rays or gamma, whereas the other, "the slave", is in a steel, lead, and copper enclosure. One measures the gamma activity in particular for the energy of the isomeric transition on the slave sample. A diagram of this implementation is illustrated on Figure 1. A enclosure (1) with a thickness of 3 mm of copper, 15 cm of lead, and 12 mm steel contains the counter of gamma (10) and the slave sample (8), which emits gamma (9) naturally. With a distance of 12 m (7), the master sample (4) is irradiated by the source of Iron 55 (2), which emits gamma rays and x-rays (3). The stimulation, well-known of the experts, occurs and additional gamma rays (5) are emitted by the master sample (4). At the same time, the stimulation of the master sample causes an additional emission of the slave sample (8) although it is inside its thick shielding and located 12 m away from the master sample.

Figure 2 is an example of measurements made on Indium sheets with 99.999% of purity, irradiated linear beforehand and simultaneously during 20 minutes with a compact linear accelerator. The source of x-ray and gamma, Iron 55, was placed during 5 minutes on the master sample, noted "YES" then withdrawn during 5 minutes, noted "NO", and so on. Measurements of Figure 2 represent the total counting during the 5 minutes of irradiation of the master sample, the 5 minutes without irradiation and so on. An important signal on the slave sample is obtained for the periods of irradiation of the master sample, except the last period for which no signal was obtained. The same experiments made with the source of Cobalt 60 give identical results but hardly higher than the noise.

The present invention can be implemented with nuclides of various half-lives. Indeed, the half-lives of the metastable nuclides usable for this invention extend from one second to 50 years. Table 1 gives a list of the main nuclides which have a metastable state. Their symbol, abundance, half-life with ordinary excitation and isomeric energy of transition are mentioned. The excited samples can be transferred to large distances and wait long periods while being always suitable for being deexcited.

The reported experiments concern a master sample and a slave sample, but a master sample can deexcite a plurality of slaves samples if a plurality of samples were excited together. In the same way, a slave sample can receive a signal of any master sample. It seems that the action occurs whatever the distance or the materials which separate master and slave. This invention thus solves a technical problem of transmission of information, for the moment very crude, but nevertheless, it is a great innovation.

Various industrial applications are immediately

possible, signals of distress in the mines, sea floors, etc. Medical applications are also possible by remotely stimulating the isomer which was placed close to, or in the organ to be treated.

5           The invention which will be thereafter detailed is not explained by the current scientific theories. Consequently, it does not result of a technique known by the experts.

10           The method, according to the invention, consists in using gamma rays for irradiating two or several samples of an element with a metastable state, this metastable state having a half-life comprised of less than one second to several years. The gamma rays used for the excitation of the samples must come either from a disintegration in a  
15 cascade in the case of a radioactive isotope, or of the Bremsstrahlung effect in which the same particle emits several gamma.

          For example, an emission in a cascade is provided by Cobalt 60. The emitted gamma rays must have a sufficient  
20 energy to carry out an isomeric reverse transition, i.e. to make the nucleus go from its ground state to a metastable state. In the case of Indium 115, for example, the energy necessary for the threshold of excitation is of 1,080 keV, condition which is met by the two gamma rays of Cobalt 60.  
25 One of the gamma has an energy of 1,173 keV with 99.90% of chances to occur, and the other 1,332 keV with 99.98% of chances to occur. We have certainly a cascade because the two gamma are emitted at a 0.713 picosecond ( $10^{-12}$  second) interval on average.

30           In the case of an irradiation by the Bremsstrahlung gamma rays of a linear accelerator of particles, for example of electrons, the gamma energy must again be higher than the threshold of excitation of the selected element.

          For example, a compact linear accelerator can emit a

gamma radiation very focused with a spectrum of gamma energy extending from 0 to 6 MeV. If the energy of all the electrons before meeting the tungsten target is 6 MeV, each electron emits on average four gamma of 1.5 MeV (1,500 keV) in a very fast succession comparable to a cascade. This cascade of gamma of the accelerator is, as the experiment shows, more efficient to carry out the work described in this invention.

According to a particular mode of the invention represented on Figure 3, which relates to an irradiation with a radioactive source emitting gamma in a cascade, the samples to be irradiated are placed in couple or more on the tray (11) which presents the groups of samples (12) in succession in front of a piston (16) which introduces them opposite a radioactive source (14) by the opening (15) using the piston. The source is placed in a thick steel and lead shielding (17). An axis (18) connects the tray to a stepper motor (19) controlled by a timer (20). The time of irradiation is adjusted for each group of samples using a timer (21) which actuates a pneumatic valve (22) to obtain the optimal response of activation. In the case of Indium 115, with a source of 111,000 GBq (3,000 Ci), several hours of excitation are necessary.

According to another mode of implementation of the invention, schematized on Figure 4, the groups of samples (23) are placed on a turning tray (24). This tray is supported by an axis (25) that is connected to a stepper motor (26), itself controlled by a timer (27). The groups of samples are presented one after the other in front of the beam of x-rays of a compact linear accelerator (28) for example. A "phantom" (29) filled with water stops the gamma rays not absorbed. In general the accelerators cannot function permanently. A certain number of units of time of irradiation, for example of 5 minutes, will be applied to



each sample to obtain the optimal excitation using a timer (30). In the case of Indium 115, a 20 minutes excitation with a compact linear accelerator is enough to have a satisfactory signal to noise ratio.

5           An ordered ensemble of independent couples of samples can also be irradiated, as shown in the figure 5. On this figure, the couples of samples are laid out on two disks, the master disk (31) and the slave disk (32), during the irradiations. The other elements of Figure 5 are identical  
10 to those of Figure 4. These disks can then be separated at any distance and exploited by stimulation of modulated deexcitation of each ordered sample of the master disk and the reception of this modulation by the sample corresponding of the slave disk, the transmission of a  
15 complex message is thus allowed. If several samples, placed in several disks, are excited together instead of a mere couple of disks, the message can be transmitted simultaneously to several slaves disks. Other supports that disks can be used. For example, platelets presented in  
20 translation in front of the generator of gamma emitted in a cascade.

          The pieces of equipment described previously are examples of implementation. Other means to present the samples to the irradiation can be employed without leaving  
25 the framework of the invention.

          The master-slave groups of samples to be irradiated are solids in sheet or powder, fluids or gases (case of Xenon for example) which contain a proportion of one or several isotopes for example mentioned in Table 1. The  
30 samples can also be alloys, mixtures or chemical compounds incorporating a proportion of one or several isotopes of Table 1. The samples of a same group can be of different nature, for example one in powder and the other in sheet. One or more of the samples of the same group can also be

transformed physically or chemically after irradiation, the sample slave in the form of powder or of gas can be incorporated in an injectable carrying molecule for example. The isomer or a salt containing the isomer can  
5 also be put in solution in the sample. An isomer plurality can be employed in this solution.

Measurements of gamma due to the isomeric transition from the slave during the stimulation of the master can be taken with the conventional instruments of the expert. A  
10 common instrument is the detector functioning with germanium crystals at low temperature. In order to minimize the effects of the cosmic rays, radon and the ambient interferences, the sample slave is placed in an enclosure with walls of copper, lead and steel, located at a long  
15 distance from the main sample (12 m in the reported experiment). A multi-channel analyzer must be able to be set on the radiation characteristic of selected isomer. For example, in the case of Indium  $115^m$ , gamma in the 336.2 keV line are counted. It is also possible that progress of the  
20 technique makes it possible to measure the radiation of 336 keV without having a special enclosure.

A temporal modulation of stimulations of deexcitation, as the example of Figure 2 shows it, can be used to send a message made up of "yes" and of "no", i.e.  
25 composed of 1 and 0 in binary language, on one or a plurality of samples. More complex modulations of the stimulations of deexcitation, such as frequency modulation or amplitude modulation, can also be used.

According to known techniques of stimulation of  
30 isomers, one can choose the optimal radiation to stimulate a particular isomer. Consequently, the main sample containing a mixture of isomers can be selectively excited. Each isomer thus represents in this case a particular "channel" of transmission.

When the isomer emits, naturally or during remote stimulation, gamma of several energy, the measurements made for each energy make it possible to improve the signal to noise ratio.

CLAIMS

1) Method and equipment to communicate or control a remote deexcitation by using isomer nuclides, characterized by the irradiation of several samples of an element having a metastable state by a source of gamma rays emitted in a cascade, either by a radioactive source, or by a generator of gamma rays coming from Bremsstrahlung of accelerated particles, with a sufficient energy to excite the aforementioned element in its metastable state, and to stimulate the deexcitation of one of the samples, the "master", which causes the deexcitation of the other samples, the "slaves", located at any distance, in any medium.

2) Method and equipment according to claim 1 characterized by the use of a plurality of samples, irradiated together, the modulated stimulation of the master being received by the slaves.

3) Method and equipment according to claim 2 characterized by the use of samples containing one or more isotopes mentioned in Table 1.

4) Method and equipment according to claim 2 characterized by the use of samples in various physical forms.

5) Method and equipment according to claim 2 characterized by the use of samples in various chemical forms.

6) Method and equipment according to claim 2 characterized by the use of a group of samples containing different isomers.

7) Method and equipment according to claim 2



CLAIMS

1) Method to communicate or control a remote deexcitation by using isomer nuclides, in which:

- one prepares two or several samples containing at least one isomer nuclide having a metastable state by irradiation with the means either of a source of gamma rays emitted in a cascade, or of a generator of gamma rays coming from Bremsstrahlung of accelerated particles, with a sufficient energy to excite the aforementioned isomer nuclide in its metastable state,
- one causes the modulated stimulation of the deexcitation by irradiation X or gamma of one or more of the aforementioned samples, the master or the masters,

characterized in that one obtains an additional modulated deexcitation of the other samples, the slaves, during the modulated stimulation of the deexcitation of the master sample or of the master samples, independently of the distances separating the samples, and the mediums separating these samples or in which they are placed.

2) Method according to claim 1 characterized in that one uses samples containing at least one isomer nuclide having one metastable state with a half-life duration of less than one second to several years, for example: Niobium (93Nb41m), Cadmium (111Cd48m), Cadmium (113Cd48m), Cesium (135Ce55m), Indium (115In49m), Tin (117Sn50m), Tin (119Sn50m), Tellurium (125Te52m), Xenon (129Xe54m), Xenon (131Xe54m), Hafnium (178Hf72m), Hafnium (179Hf72m), Iridium (193Ir77m), Platinum (195Pt78m).

3) Method according to anyone of the claims 1 or 2 characterized in that one uses samples containing several

characterized by the use of a group of samples of which one at least underwent a physical transformation after irradiation.

8) Method and equipment according to claim 2  
5 characterized by the use of a group of samples of which one at least underwent a chemical conversion after irradiation.

9) Method and equipment according to claim 2  
characterized by the use of at least one master sample and at least one slave sample.

10 10) Method and equipment according to claim 2  
characterized by the use of at least one sample made up of isomers which emits gamma of different energy at the time of the deexcitation.

11) Method and equipment according to claim 2  
15 characterized by the use of a stimulation modulated in amplitude of at least one master sample.

12) Method and equipment according to claim 2  
characterized by the use of a stimulation modulated in time and applied to at least one master sample.

20 13) Method and equipment according to claim 2  
characterized by the use of a plurality of samples placed on at least two identical supports

14) Method and equipment according to claim 13  
characterized by the use of a plurality of samples used in  
25 a sequence to transmit a complex message.

excited isomer nuclides of which the gamma response of each one of them is measured simultaneously.

4) Method according to anyone of the claims 1, 2 or 3 characterized in that one uses samples containing at least  
5 one excited isomer nuclide of which the gamma response is made up of a plurality of lines measured simultaneously.

5) Method according to anyone of the claims 1, 2, 3 or 4 characterized in that one uses samples in various physical forms or various chemical forms.

10 6) Method according to anyone of the claims 1, 2, 3, 4 or 5 characterized in that one uses a group of samples of which one at least underwent a physical or chemical transformation after irradiation.

7) Method according to anyone of the claims 1, 2, 3, 4, 5  
15 or 6 characterized in that it one uses a stimulation modulated in amplitude of at least a master sample.

8) Method according to anyone of the claims 1, 2, 3, 4, 5, 6 or 7 characterized in that one uses a stimulation modulated in the time of at least one master sample.

20 9) Device of implementation of the method according to anyone of claims 1 to 8 characterized in that it includes:

- An apparatus of excitation irradiating two or several samples containing at least one isomer nuclide having a metastable state with the means either of a source  
25 of gamma rays emitted in a cascade, or of a generator of gamma rays coming from Bremsstrahlung of accelerated particles, with a sufficient energy to excite the aforementioned isomer nuclide in its metastable state,
- 30 - One or more apparatuses of modulated stimulation deexciting by X-ray or gamma irradiation one or more of the samples irradiated previously, the master or

the masters,

- One or more apparatuses of detection measuring the gamma rays emitted by one or more of the other samples irradiated previously, the slave or the slaves.

5 10) Device according to claim 9 characterized in that the samples of each group are laid out on only one support in the apparatus of excitation, thereafter being separated and being positioned in relation to each other in the apparatus or in the apparatuses of modulated stimulation and in the  
10 apparatus or the apparatuses of detection.

11) Device according to claim 9 characterized in that the samples of each group are laid out on a plurality of supports in the apparatus of excitation, the supports being thereafter separated and positioned in synchronous relation  
15 to each other in the apparatus or the apparatuses of modulated stimulation and in the apparatus or the apparatuses of detection.

12) Device according to one of the claims 9, 10 or 11 characterized in that the groups of samples is arranged  
20 according to a definite scheduling allowing the transmission of complex messages.

13) Use of the method according to anyone of claims 1 to 8 to remotely transmit information, in particular emergency signals.



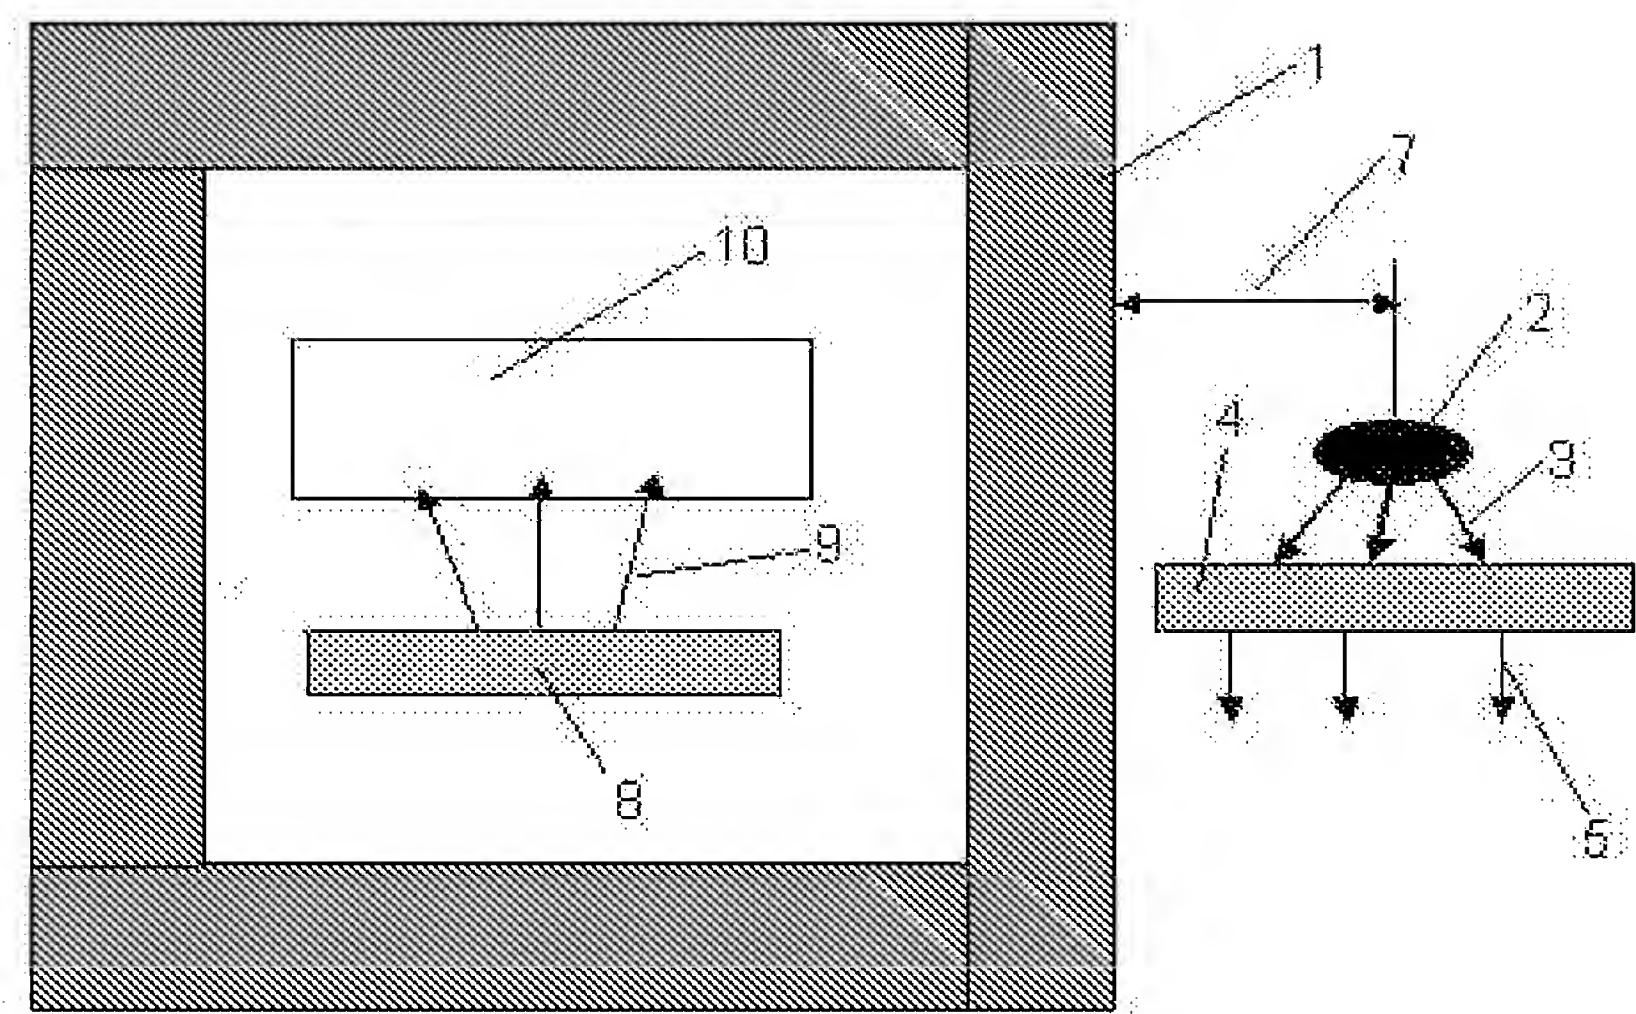


FIG. 1

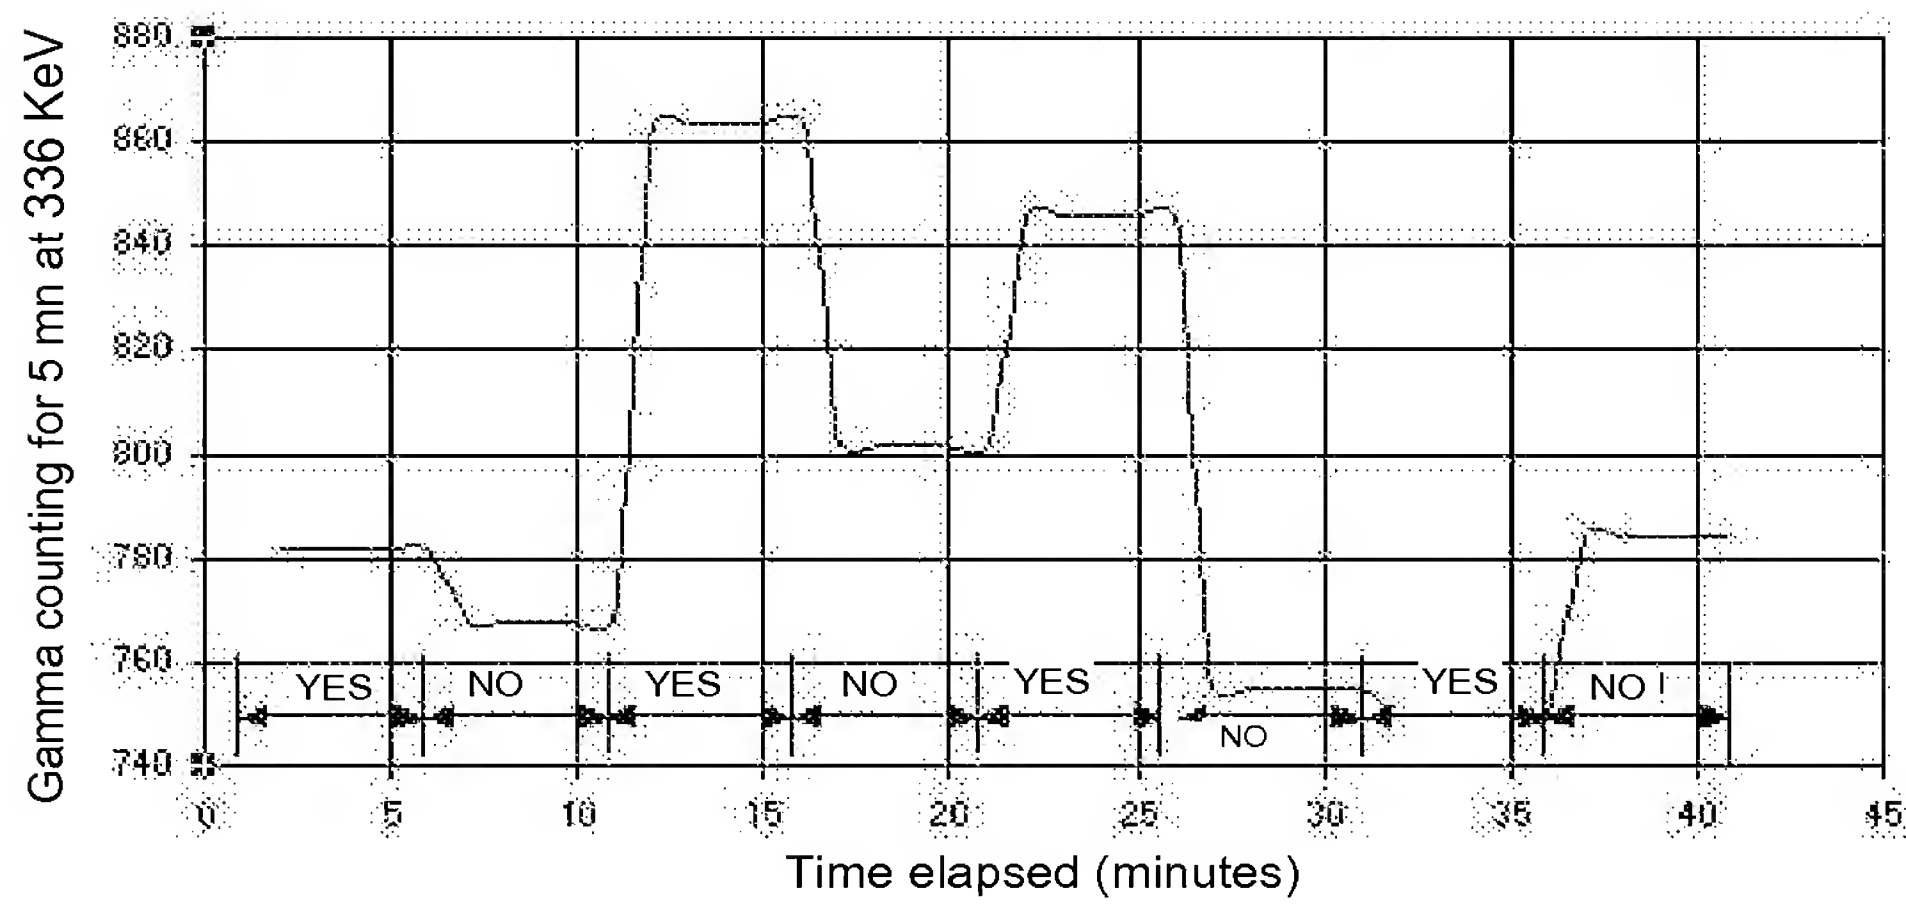


FIG. 2

A schematic diagram of a multi-channel detection system. At the top left, a rectangular unit labeled 30 has two input lines from the left and two output lines connecting to a large shaded rectangular area labeled 28. Below unit 28 is another shaded rectangular area. In the center, there is a circular platform labeled 29 containing ten small cylindrical components arranged in two rows of five; one component is specifically labeled 23. A thick vertical rod labeled 25 extends downwards from the center of the circular platform to a horizontal rectangular base labeled 26. To the right of the base 26 is a square unit labeled 27, which has three output lines extending to the right.

**FIG.4**

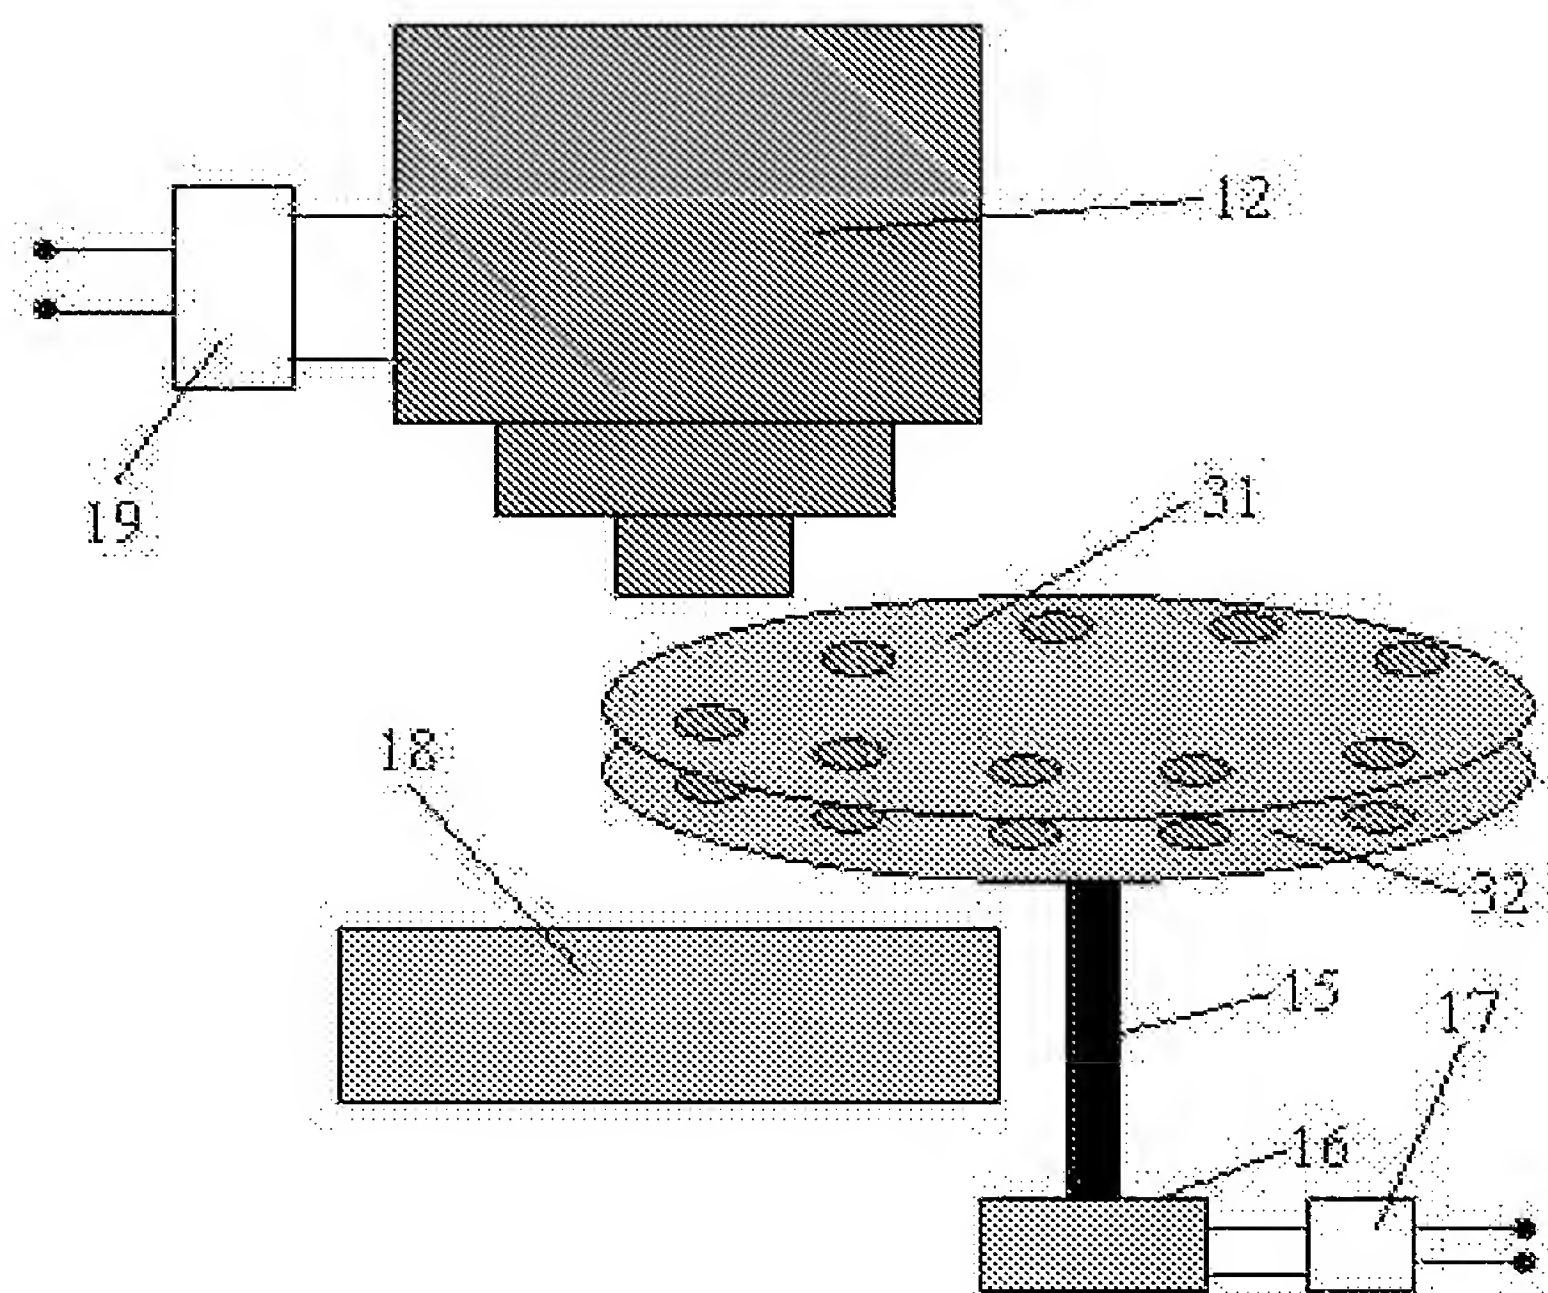



FIG.5

Nuclide	Symbol	Abundance %	Half-life	Gamma keV
Niobium	93Nb41	100	16.3 y	31.8
Cadmium	111Cd48	12.8	48.54 m	396.2
Cadmium	113Cd48	12.2	14.1 y	263.5
Cesium	135Ce	-	53 m	846/786
Indium	115In49	95.7	4.48 h	336.2
Tin	117Sn50	7.7	13.6 y	314.6
Tin	119Sn50	8.6	293 d	60.5
Tellurium	125Te52	7.1	57.4 d	144.8
Xenon	129Xe54	26.5	8.8 d	238.1
Xenon	131Xe54	21.2	11.8 d	163.9
Hafnium	178Hf72	27.3	31 y	574/.../93
Hafnium	179Hf72	13.6	25 d	453/.../122
Iridium	193Ir77	62.7	10.5 d	80.2
Platinum	195Pt78	33.8	4 d	259.3

m: minutes, h: hours, d: days, y: years.

TABLE 1

I certify that this document is the English translation,  
to the best of my knowledge, of the document  
referenced in the first page.

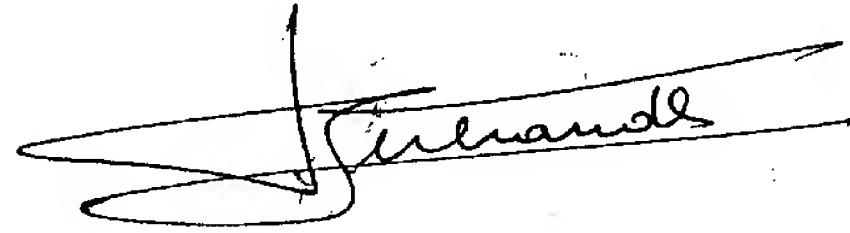A handwritten signature in black ink, appearing to read "Desbrandes", with a large, stylized flourish on the left side.

Robert DESBRANDES, inventor